


9. Internal timer with constant speeds/ Powered roof ventilator


This application macro is intended e.g. for timed powered roof ventilator applications which alternate between two constant speeds (constant speed 1 and 2) with a built-in timer. This macro has also boost function which activates constant speed 2 after a digital input 3 (DI3) has been momentarily activated. See the following figure.

For further information see section "*Real-time clock and timer functions*".

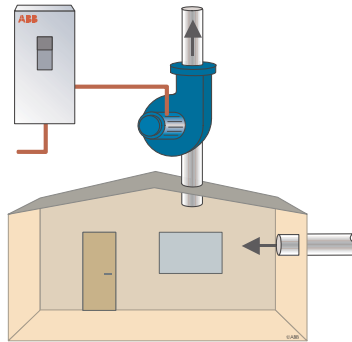

©ABB

Internal timer with constant speeds

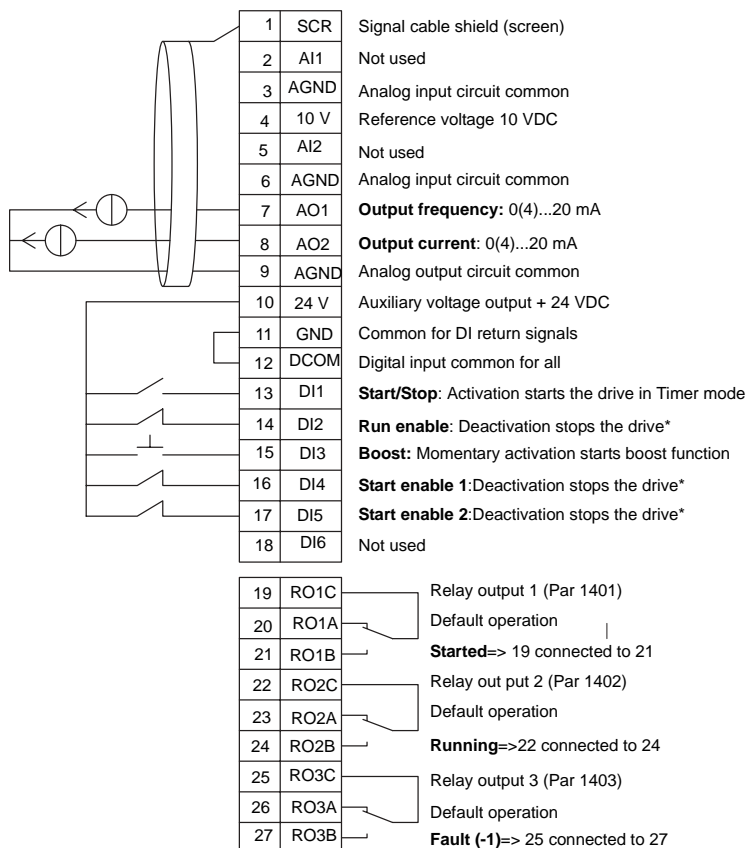

*Disable/enable with parameters 1601,1608 and 1609

Note! Drive starts only if possible protection functions (Run enable or Start enable 1 and 2) are activated from I/O or disabled with parameters.